



**Your partner
for worker safety and
production efficiency**

2M12 U0-V3 N
2M12 U0-V-U0 N
2M12 U0-V7 LG N


Primary Belts for Warehouse and Distribution Centers



KEY FEATURES	BENEFITS
Low noise fabric construction	▶ Quiet running at higher sortation speeds - reduces overall noise levels
20-50% stronger than most competitors belts	▶ Added safety factor for peak loads, less tensioning required
Low CoF backside fabric	▶ Energy saving, extended belt and slider bed life
Unique fabric construction	▶ Improved lace holding to minimize downtime



Code	Type	Cover Hard. (Sh A)	Cover surface	Min. Pulley (inches / mm)	Thick. (inches / mm)	Strength (N/mm)	Clipper Hook	Main application	Features
NA-46	2M12 U0-V3 N	70	smooth	1.6 / 40	0.08 / 1.9	12	UCM36SP	Horizontal conveying, Unloader	Black matt finish on top cover
NA-1468	2M12 U0-V-U0 N	NA	impregn. fabric	1.6 / 40	0.07 / 1.7	12	UCM36SP	Diverting, Accumulation	Low friction top cover
NA-1458	2M12 U0-V7 LG N	45	longitud. grooves	1.6 / 40	0.11 / 2.7	12	UCM36	Inclines, Declines Induction	High friction cover

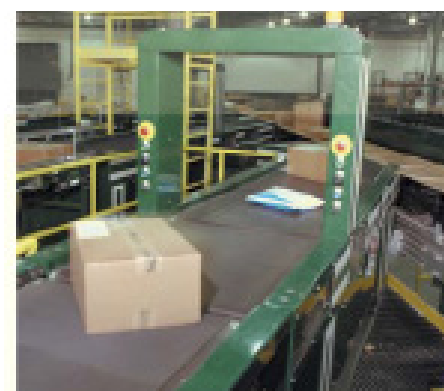

In addition to the belt types above, Chiorino America has a **broad range** for Warehouse and Distribution Centers including belts for:

- Live roller
- Cross belt sorters
- Unloaders
- Induction
- Pop-up wheel sorter

Contact us to **optimize your system, reduce noise and increase throughput.**